

DKD Cable Ladder H60

Information:

Application

Cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel sections to 3m long (SS)

L- powder coating in a full range of colours (PC)

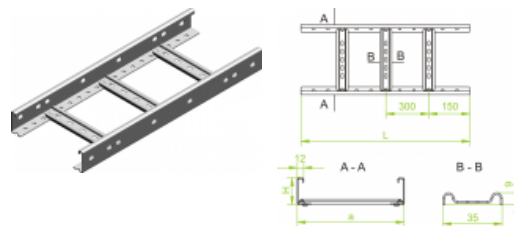

NOTE: Cable ladder with rungs adapted for use with Cable Clamps UKZ

Available upon special order:

- cable ladders 2m long

- cable ladders 150, 250mm wide.

versions:

Sheet thickness: **1,2 mm**

Symbol	Width a [mm]	Length L [m]	Effective section	Weight [1m]	Catalogue number	Quantity in box
DKD100H60/3N	100	3000	4200	2,01	465110	4
DKD100H60/6N	100	6000	4200	2,01	465210	2
DKD200H60/3N	200	3000	8400	2,24	465120	4
DKD200H60/6N	200	6000	8400	2,24	465220	2
DKD300H60/3N	300	3000	12600	2,47	465130	2
DKD300H60/6N	300	6000	12600	2,47	465230	2
DKD400H60/3N	400	3000	16800	2,81	465140	2
DKD400H60/6N	400	6000	16800	2,81	465240	2
DKD500H60/3N	500	3000	21000	2,92	465150	2
DKD500H60/6N	500	6000	21000	2,92	465250	2
DKD600H60/3N	600	3000	25200	3,15	465160	2
DKD600H60/6N	600	6000	25200	3,15	465260	2

Related products:

